



## item number / CE.PLB.3CCT.40

Astroy 40W,1200\*300mm back-lit panel light

Non dimmable driver with Flex & Plug.

White powder coated aluminium frame - 10mm height.

Designed to be used in T BAR grid suspended ceilings.

UGR 19 (Unified Glare Rating) compliant to AS/NZS 1690.1 and EN 12464.

Recommended for use in office spaces, schools, open business task areas, reading & writing.

No flicker technology for greater eye protection.

## Application

Residential, commercial indoor areas

## Design Specifications

BRAND : CERIAN

double layer micro prismatic diffuser

Cerian quality 3CCT tri-colour panel light 40W, IP44

<b>Wattage</b>	40W	<b>Tri-Colour Changeable</b>	yes
<b>Luminous</b>	110LM/w	<b>Colour Temp</b>	3000k-4000K-6000K
<b>Dimmable</b>	no	<b>Cut-out</b>	1200*300mm recessed mount
<b>IP Rated</b>	44	<b>CRI</b>	83
<b>Frequency</b>	50/60Hz	<b>Power Factor</b>	0.95
<b>LED Type</b>	SMD LED Strips	<b>Beam Angle</b>	120
<b>Working Temp</b>	-20C-+50C	<b>Input Voltage</b>	AC 220-265V
<b>Safety Class</b>	II	<b>Material</b>	Aluminium frame
<b>IK rated</b>		<b>Product Dimension</b>	1200*300*28mm
<b>Optional</b>	dimmable driver	<b>Lifespan (hours)</b>	50,000

## Performance


High lumens 110lm/W, IP44

## Technical Specification

Item No	description	wattage	CCT	material	CRI	PF	dimensions
CE.PLB.3CCT-40	1200*300mm tri-colour	40W	tri-colour	Aluminum	+80	90	1200*100*28mm

## Dimensions

### 3CCT-LED BACKLIT PANEL LIGHT - 295X1195MM

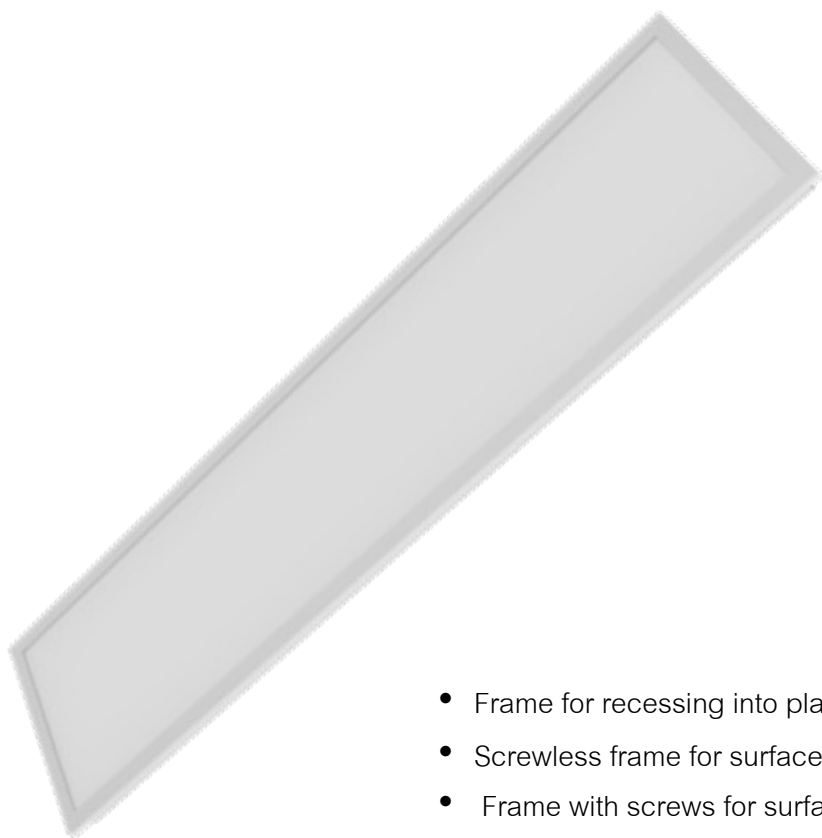

- Frame for recessing into plaster ceilings –
- Screwless frame for surface mount applications-
- Frame with screws for surface mount applications.
- Product Weight 2.9kg
- Power Consumption: 40 Watt IP Rating IP44